

CABINET & ACCESSORIES



Contents

	Page No
Wall Mount Cabinet Single Section	3
Wall Mount Cabinet Single Section ES	7
Wall Mount Cabinet Single Section IP 65	9
Wall Mount Cabinet Single Section IP 55	11
Wall Mount Cabinet Double Section	12
Floor Standing Cabinet	15
Floor Standing Cabinet IP 55	23
Power Distribution Unit	24
Open Rack	26
Cantilever Shelf	27
Fixed Shelf	27
Heavy Duty Fixed Shelf	28
Sliding Shelf	28
Keyboard Tray	29
Key Board Tray With Mouse Panel	29
Plinth	30
Fan Unit	30
Single Fan	31
1U Fan Unit	31
1U Fan Unit With Thermostat	31
Metal Cable Management	32
Plastic Cable Management	32
Blank Panel	33
Brush Panel	33
Digital Temperature Unit	34
Adjustable Feet	35
Castors	35

Wall Mount Cabinet Single Section



The Easycab range of wall cabinets designed for office environment. The cabinet's structure is welded and painted with electro static powder coated finish.Easycab available in different sizes. Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC 297-2, DIN41497 part 7, GB/T3047, 2-92 standards.

FEATURES


- Easy installation
- Standing or wall mounting installation
- Cable entry through bottom and top panel
- Removable side panel
- 180 degree turning angle for front door
- Welded frame
- 19" installation



Material	SPCC cold rolled steel
Degree of protection	IP20
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	60 KGS

STRUCTURE

- 1. Side panel
- 2. Cable entry cover
- 3. Fan cover
- 4. Frame
- 5. Mounting profile
- 6. Lock
- 7. Front door
- 8. Mounting panel

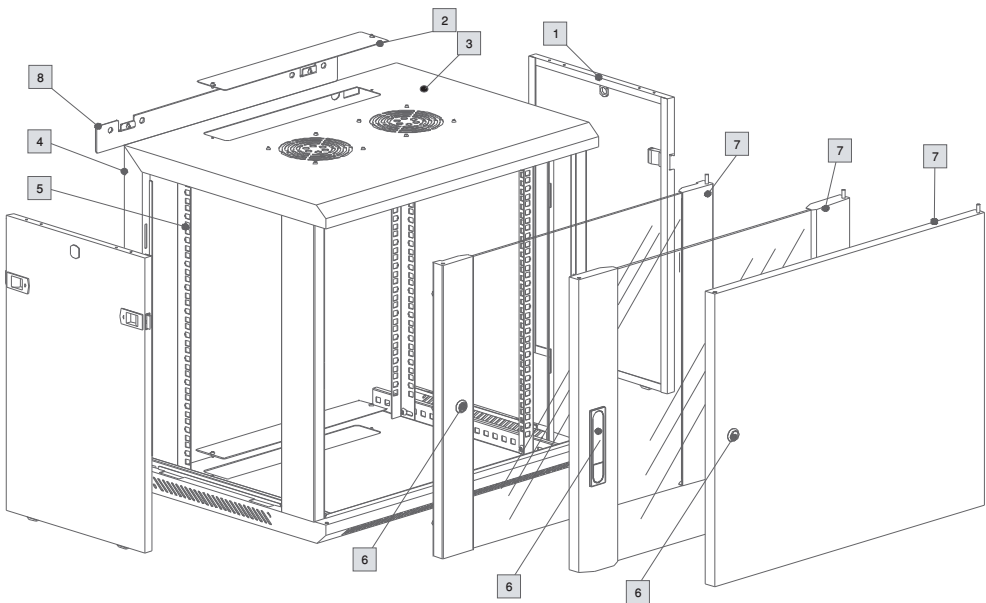

Wall Mount Cabinet Single Section



ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Front door glass	5mm toughened glass door /1.2mm SPCC cold rolled steel	Powder coating	1 piece
Allen wrench	Steel	Black colour	1 piece
Mounting Panel	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Cable entry cover	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Fan cover	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Mounting Profile	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Lock with 2 keys	-	-	2 Piece
Frame	1.2mm SPCC cold rolled steel	Powder coating	1 piece
M6 Square nut	Steel	Zinc colour	10 piece (20Pcs for over 12U)
M6 head screw	Steel	Zinc colour	10 piece (20Pcs for over 12U)
Side Panel	1.2mm SPCC cold rolled steel	Powder coating	2 piece

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
600 x 450 Size			
1311-046410X	04U 600 x 435 Single Section Cabinet	04	600 x 435 x 279
1311-066410X	06U 600 x 450 Single Section Cabinet	06	600 x 450 x 368
1311-096410X	09U 600 x 450 Single Section Cabinet	09	600 x 450 x 501
1311-126410X	12U 600 x 450 Single Section Cabinet	12	600 x 450 x 635
1311-156410X	15U 600 x 450 Single Section Cabinet	15	600 x 450 x 769
1311-186410X	18U 600 x 450 Single Section Cabinet	18	600 x 450 x 901
1311-226410X	22U 600 x 450 Single Section Cabinet	22	600 x 450 x 1082
1311-276410X	27U 600 x 450 Single Section Cabinet	27	600 x 450 x 1304
600 x 600 Size			
1311-066610X	06U 600 x 600 Single Section Cabinet	06	600 x 600 x 368
1311-096610X	09U 600 x 600 Single Section Cabinet	09	600 x 600 x 501
1311-126610X	12U 600 x 600 Single Section Cabinet	12	600 x 600 x 635
1311-156610X	15U 600 x 600 Single Section Cabinet	15	600 x 600 x 769
1311-186610X	18U 600 x 600 Single Section Cabinet	18	600 x 600 x 901
1311-226610X	22U 600 x 600 Single Section Cabinet	22	600 x 600 x 1082
1311-276610X	27U 600 x 600 Single Section Cabinet	27	600 x 600 x 1304

X: Colour

Wall Mount Cabinet

Single Section

The Easycab range of wall cabinets designed for home/office environment. The cabinet's structure is welded and painted with electro static powder coated finish. Easycab available in different sizes. Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC 297-2, DIN41497 part 7, GB/T3047, 2-92 standards.


FEATURES

- Easy installation
- Standing or wall mounting installation
- Cable entry through bottom and top panel
- 180 degree turning angle for front door
- Tempered front glass door
- Welded frame
- 19" installation
- 3U blanking panel

Material	SPCC cold rolled steel
Degree of protection	IP20
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	60 KGS



STRUCTURE

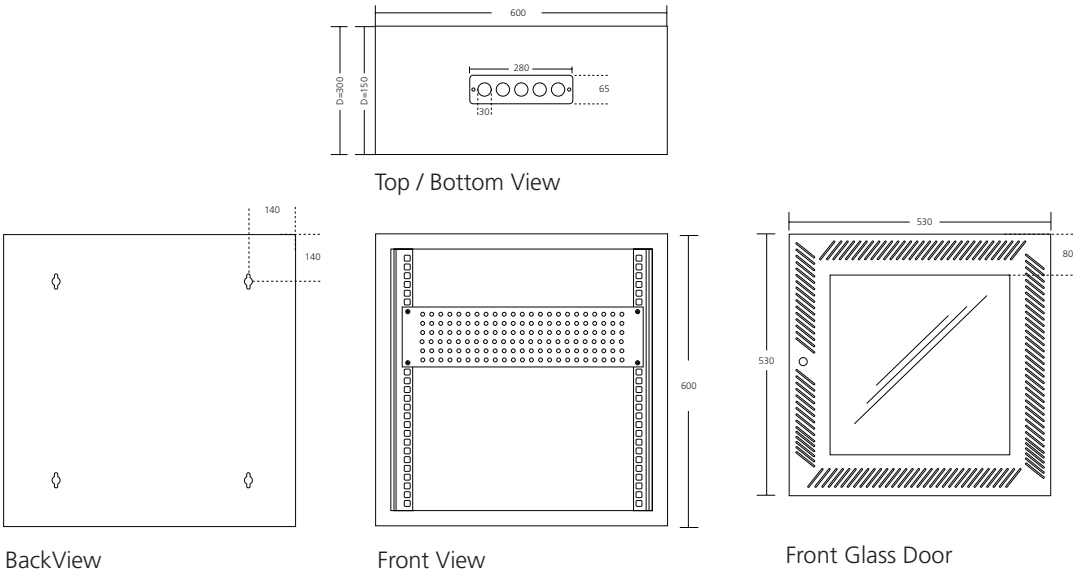

Wall Mount Cabinet Single Section



ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Front door	5mm toughened glass door /1.2mm SPCC cold rolled steel	Powder coating	1 piece
Cable entry cover	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Mounting Profile	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Lock with 2 keys	-	-	1 Piece
Frame	1.2mm SPCC cold rolled steel	Powder coating	1 piece

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
1311-126310X	12U 600 x 300 Single Section Cabinet	12	600 x 300 x 600
1311-126210X	12U 600 x 150 Single Section Cabinet	12	600 x 150 x 600

X: Colour



Wall Mount Cabinet
Single Section ES

The Easycab range of wall cabinets designed for home/office environment. The cabinet's structure is welded and painted with electro static powder coated finish. Easycab is available in different sizes.

FEATURES


- Easy installation
- Standing or wall mounting installation
- Cable entry through bottom and top panel
- 120 degree turning angle for front door
- Tempered front glass lockable door
- Welded frame
- Easy mountable back plate




Material	SPCC cold rolled steel
Degree of protection	IP20
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	20 KGS

STRUCTURE


Top View




Back View




Front View



Front Glass Door



Inside Plate

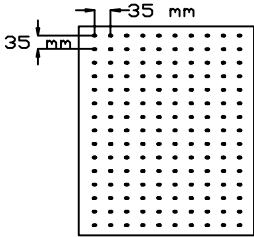

Wall Mount Cabinet Single Section ES



ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Front glass door	4 mm toughened glass door / 1.1mm SPCC cold rolled steel	Powder coating	1 piece
Cable entry cover	1.1mm SPCC cold rolled steel	Powder coating	1 piece
Mounting Plate	Perforated Back plate / 1.1mm SPCC cold rolled steel	Powder coating	1 piece
Lock with 2 keys	-	-	1 Piece
Frame	1.1mm SPCC cold rolled steel	Powder coating	1 piece

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
1311-124110X	12U 425 x 120 Single Section ES Cabinet F / Glass door	12	600 x 425 x 120

X: Colour



Wall Mount Cabinet Single Section-IP 65



The Easycab range of wall cabinets designed for Outdoor environment. The cabinet's structure is welded and painted with electro static powder coated finish. Easycab available in different sizes. Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC 297-2, DIN41497 standards.

FEATURES

Easy installation
Standing or wall mounting installation
Cable entry through bottom panel
Fixed side panel
130 degree turning angle for front door
Welded frame
19" installation



Material	SPCC cold rolled steel or Stainless Steel
Degree of protection	IP65
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	60 KGS
Body Color	RAL 7032 / RAL 7035

ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Cable entry cover	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Mounting Profile	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Lock with key	-	-	1 Piece
Frame	1.2mm SPCC cold rolled steel	Powder coating	1 piece
M6 Square nut	Steel	Zinc colour	10 piece (20Pcs for over 12U)
M6 head screw	Steel	Zinc colour	10 piece (20Pcs for over 12U)

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
600 x 450 Size			
1318-046420X	04U 600 x 435 Single Section Cabinet	04	600 x 435 x 279
1318-066420X	06U 600 x 450 Single Section Cabinet	06	600 x 450 x 368
1318-096420X	09U 600 x 450 Single Section Cabinet	09	600 x 450 x 501
1318-126420X	12U 600 x 450 Single Section Cabinet	12	600 x 450 x 635
1318-156420X	15U 600 x 450 Single Section Cabinet	15	600 x 450 x 769
1318-186420X	18U 600 x 450 Single Section Cabinet	18	600 x 450 x 901
1318-226420X	22U 600 x 450 Single Section Cabinet	22	600 x 450 x 1082
1318-276420X	27U 600 x 450 Single Section Cabinet	27	600 x 450 x 1304



Wall Mount Cabinet

Single Section-IP 65



600 x 600 Size			
1318-066620X	06U 600 x 600 Single Section Cabinet	06	600 x 600 x 368
1318-096620X	09U 600 x 600 Single Section Cabinet	09	600 x 600 x 501
1318-126620X	12U 600 x 600 Single Section Cabinet	12	600 x 600 x 635
1318-156620X	15U 600 x 600 Single Section Cabinet	15	600 x 600 x 769
1318-186620X	18U 600 x 600 Single Section Cabinet	18	600 x 600 x 901
1318-226620X	22U 600 x 600 Single Section Cabinet	22	600 x 600 x 1082
1318-276620X	27U 600 x 600 Single Section Cabinet	27	600 x 600 x 1304

600 x 800 Size			
1318-068620X	06U 600 x 800 Single Section Cabinet	06	600 x 800 x 368
1318-098620X	09U 600 x 800 Single Section Cabinet	09	600 x 800 x 501
1318-126820X	12U 600 x 800 Single Section Cabinet	12	600 x 800 x 635
1318-156820X	15U 600 x 800 Single Section Cabinet	15	600 x 800 x 769
1318-186820X	18U 600 x 800 Single Section Cabinet	18	600 x 800 x 901
1318-226820X	22U 600 x 800 Single Section Cabinet	22	600 x 800 x 1082
1318-276820X	27U 600 x 800 Single Section Cabinet	27	600 x 800 x 1304

X: Colour



Wall Mount Cabinet Single Section-IP 55



The Easycab range of wall cabinets designed for Outdoor environment. The cabinet's structure is welded and painted with electro static powder coated finish. Easycab available in different sizes. Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC 297-2, DIN41497 standards.

FEATURES

Easy installation
Standing or wall mounting installation
Cable entry through bottom panel
Fixed side panel
130 degree turning angle for front door
Welded frame
19" installation



Material	SPCC cold rolled steel or Stainless Steel
Degree of protection	IP55
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	60 KGS
Body Color	RAL 7032 / RAL 7035

ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Cable entry cover	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Mounting Profile	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Lock with key	-	-	1 Piece
Frame	1.2mm SPCC cold rolled steel	Powder coating	1 piece
M6 Square nut	Steel	Zinc colour	10 piece (20Pcs for over 12U)
M6 head screw	Steel	Zinc colour	10 piece (20Pcs for over 12U)

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
600 x 450 Size			
1317-046420X	04U 600 x 435 Single Section IP 55 Outdoor Cabinet	04	600 x 435 x 279
1317-066420X	06U 600 x 450 Single Section IP 55 Outdoor Cabinet	06	600 x 450 x 368
1317-096420X	09U 600 x 450 Single Section IP 55 Outdoor Cabinet	09	600 x 450 x 501
1317-126420X	12U 600 x 450 Single Section IP 55 Outdoor Cabinet	12	600 x 450 x 635
1317-156420X	15U 600 x 450 Single Section IP 55 Outdoor Cabinet	15	600 x 450 x 769
1317-186420X	18U 600 x 450 Single Section IP 55 Outdoor Cabinet	18	600 x 450 x 901
1317-226420X	22U 600 x 450 Single Section IP 55 Outdoor Cabinet	22	600 x 450 x 1082
1317-276420X	27U 600 x 450 Single Section IP 55 Outdoor Cabinet	27	600 x 450 x 1304



Wall Mount Cabinet

Single Section-IP 55



600 x 600 Size			
1317-066620X	06U 600 x 600 Single Section IP 55 Outdoor Cabinet	06	600 x 600 x 368
1317-096620X	09U 600 x 600 Single Section IP 55 Outdoor Cabinet	09	600 x 600 x 501
1317-126620X	12U 600 x 600 Single Section IP 55 Outdoor Cabinet	12	600 x 600 x 635
1317-156620X	15U 600 x 600 Single Section IP 55 Outdoor Cabinet	15	600 x 600 x 769
1317-186620X	18U 600 x 600 Single Section IP 55 Outdoor Cabinet	18	600 x 600 x 901
1317-226620X	22U 600 x 600 Single Section IP 55 Outdoor Cabinet	22	600 x 600 x 1082
1317-276620X	27U 600 x 600 Single Section IP 55 Outdoor Cabinet	27	600 x 600 x 1304

600 x 800 Size			
1317-068620X	06U 600 x 800 Single Section IP 55 Outdoor Cabinet	06	600 x 800 x 368
1317-098620X	09U 600 x 800 Single Section IP 55 Outdoor Cabinet	09	600 x 800 x 501
1317-126820X	12U 600 x 800 Single Section IP 55 Outdoor Cabinet	12	600 x 800 x 635
1317-156820X	15U 600 x 800 Single Section IP 55 Outdoor Cabinet	15	600 x 800 x 769
1317-186820X	18U 600 x 800 Single Section IP 55 Outdoor Cabinet	18	600 x 800 x 901
1317-226820X	22U 600 x 800 Single Section IP 55 Outdoor Cabinet	22	600 x 800 x 1082
1317-276820X	27U 600 x 800 Single Section IP 55 Outdoor Cabinet	27	600 x 800 x 1304

X: Colour



Wall Mount Cabinet

Double Section



The Easycab range of wall cabinets designed for office environment. The cabinet's structure is welded and painted with electro static powder coated finish. Removable side panels ensure easy installation and maintenance. Easycab available in different sizes. Comply with ANSI/ EIA RS-310-D, DIN41497 part 1, IEC 297-2, DIN41497 part 7, GB/ T3047, 2-92 standards.

FEATURES


- Easy installation
- Standing or wall mounting installation
- Cable entry through bottom and top panel
- Removable side panel
- 180 degree turning angle for front door
- Welded frame
- 19" installation
- Easy maintenance through back side



Material	SPCC cold rolled steel
Degree of protection	IP20
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	60 KGS

STRUCTURE

- 1. Side panel
- 2. Cable entry cover
- 3. Fan cover
- 4. Frame
- 5. Mounting profile
- 6. Lock
- 7. Front Door
- 8. Back panel

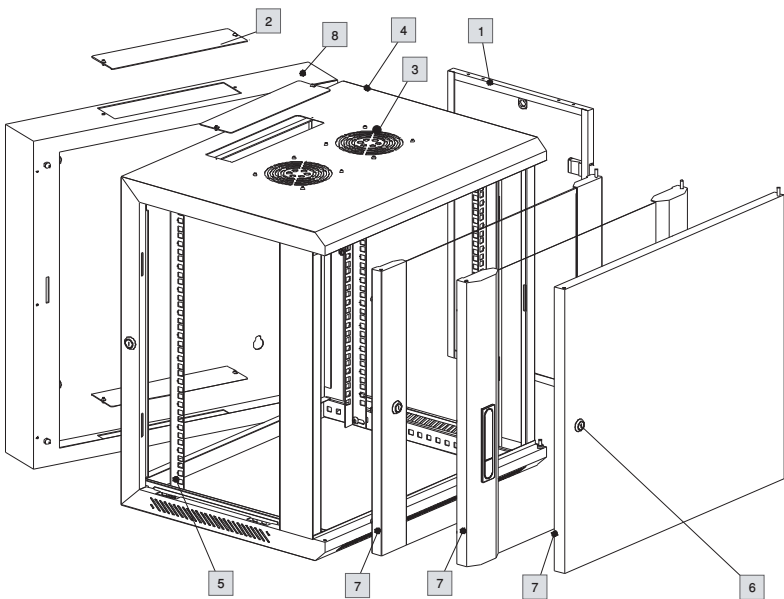

Wall Mount Cabinet Double Section

ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Front door	5MM toughened glass door /1.2mm SPCC cold rolled steel	Powder coating	1 piece
Allen wrench	Steel	Black colour	1 piece
Mounting Panel	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Cable entry cover	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Fan cover	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Mounting Profile	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Lock with 2 keys	-	-	2 Piece
Frame	1.2mm SPCC cold rolled steel	Powder coating	1 piece
M6 Square nut	Steel	Zinc colour	10 piece (20 Pcs for over 12U)
M6 head screw	Steel	Zinc colour	10 piece (20 Pcs for over 12U)
Side Panel	1.2mm SPCC cold rolled steel	Powder coating	2 piece

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
600 x 550 Size			
1312-066510X	06U 600 x 550 Double Section Cabinet	06	600 x 550 x 368
1312-096510X	09U 600 x 550 Double Section Cabinet	09	600 x 550 x 501
1312-126510X	12U 600 x 550 Double Section Cabinet	12	600 x 550 x 635
1312-156510X	15U 600 x 550 Double Section Cabinet	15	600 x 550 x 769
1312-186510X	18U 600 x 550 Double Section Cabinet	18	600 x 550 x 901
1312-226510X	22U 600 x 550 Double Section Cabinet	22	600 x 550 x 1082
1312-276510X	27U 600 x 550 Double Section Cabinet	27	600 x 550 x 1304
600 x 600 Size			
1312-066610X	06U 600 x 600 Double Section Cabinet	06	600 x 600 x 368
1312-096610X	09U 600 x 600 Double Section Cabinet	09	600 x 600 x 501
1312-126610X	12U 600 x 600 Double Section Cabinet	12	600 x 600 x 635
1312-156610X	15U 600 x 600 Double Section Cabinet	15	600 x 600 x 769
1312-186610X	18U 600 x 600 Double Section Cabinet	18	600 x 600 x 901
1312-226610X	22U 600 x 600 Double Section Cabinet	22	600 x 600 x 1082
1312-276610X	27U 600 x 600 Double Section Cabinet	27	600 x 600 x 1304

X: Colour



Floor Standing Cabinet



The Easycab range of floor standing cabinets designed for communication rooms and data centers. The smart design and professional engineering provides easy installation and maintenance. Comply with ANSI/EIA RS-310-D, IEC 297-2, DIN 41491, PART 1, DIN 41497, PART 7, GB/T3047.2-92, ETSI standards.

Material	SPCC cold rolled steel
Degree of protection	IP20
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	800 KGS
Material thickness	Mounting profile: 2.0mm angel: 1.5mm, Other: 1.2mm


FEATURES

Intelligent design ensures easy installation
Cable entry through bottom and top panel
Removable side panel provides easy maintenance
180 degree turning angle for front door
Toughened glass door
19" installation
Adjustable feet and heavy duty castors
Plinth and rack fans are optional




STRUCTURE

1. Top cover
2. Fan unit
3. Mounting profile
4. Mounting angle
5. Rear door with square holes
6. High-density vented rear door
7. Steel door without hole
8. Bottom panel
9. 2" heavy duty castor
10. Frame
11. Side panel
12. Front door
13. Front door
14. Front door

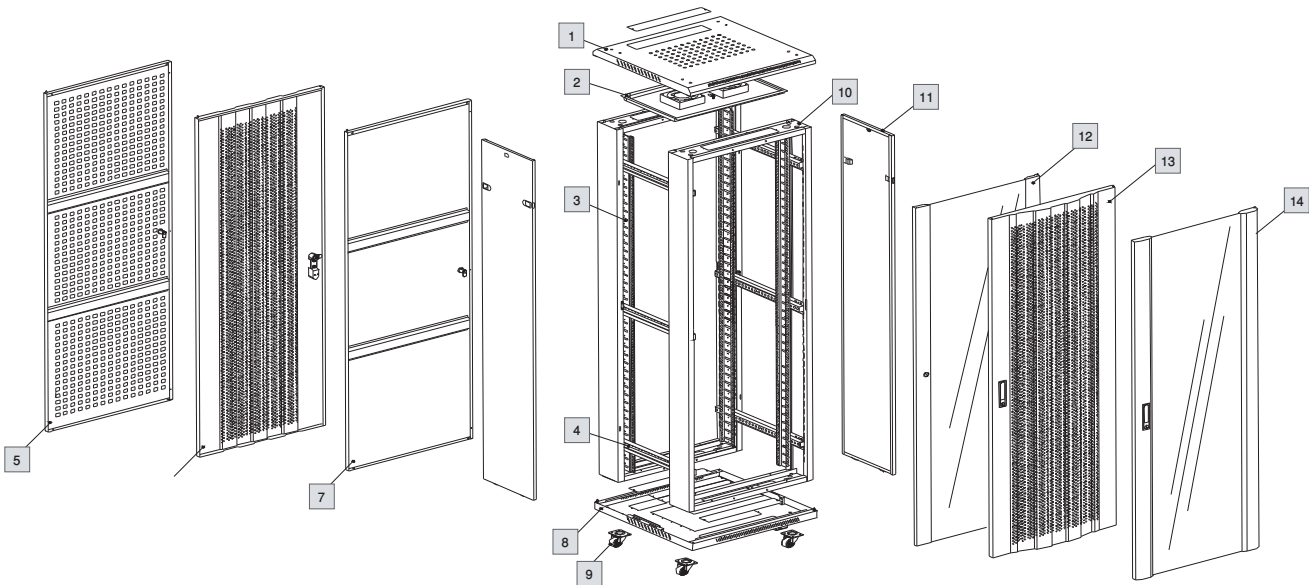


Floor Standing Cabinet


DOOR OPTION

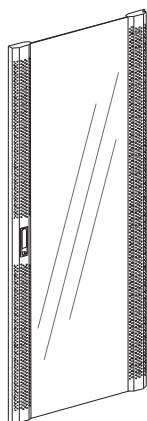


Front Glass

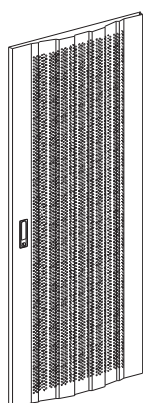


Front Perforated

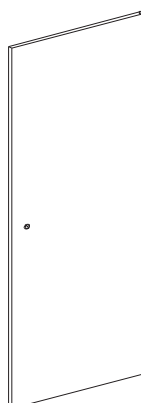


Front Metal

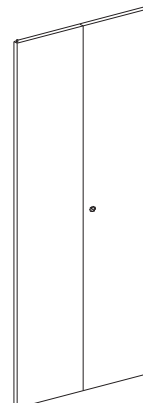


Front Metal Divided

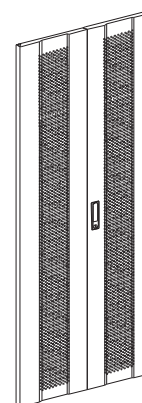


Front Perforated Divided

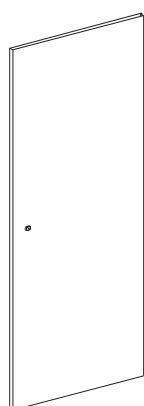


Back Metal

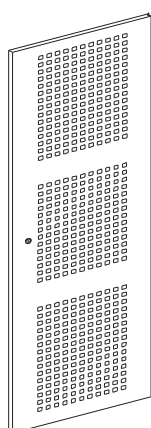

Back Perforated

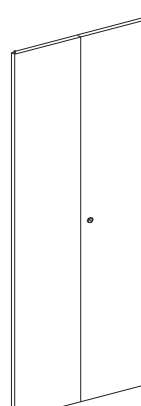

Back Metal Divided

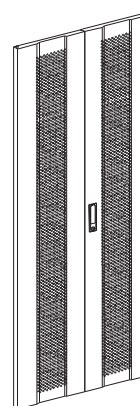

Back Perforated Divided

ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Top cover	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Spring Lock with 2 keys	-	Black	1 piece
Mounting Angle, 4 Pcs for lower 32U	1.5mm SPCC cold rolled steel	Powder coating	6 piece
Toughened glass front door, round vented border	1.2mm Toughened glass/SPCC cold rolled steel	Powder coating	1 piece
2" heavy duty castors	-	-	4piece
Mounting Profile	2.0mm SPCC cold rolled steel	Powder coating	4piece
Small round Lock with 2 keys		Nickel coating	1 Piece
Frame	1.2mm SPCC cold rolled steel	Powder coating	2piece
M6 Square nut, 40 sets for upper 32U	steel	Zinc colour	20piece
M6 B head screw, 40 sets for upper 32U	steel	Zinc colour	20 piece
Side Panel	1.2mm SPCC cold rolled steel	Powder coating	2 piece
Square hole rear door, square vent	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Bottom panel	1.2mm SPCC cold rolled steel	Powder coating	1 piece
Allen wrench	steel	Black colour	1 piece
M12 adjustable feet	-	-	4piece

Floor Standing Cabinet



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
600 x 600 Size			
1323-186613X	18U 600 x 600 Front Glass/Back Perf Door	18	600 x 600 x 988
1323-226613X	22U 600 x 600 Front Glass/Back Perf Door	22	600 x 600 x 1166
1323-276613X	27U 600 x 600 Front Glass/Back Perf Door	27	600 x 600 x 1388
1323-326613X	32U 600 x 600 Front Glass/Back Perf Door	32	600 x 600 x 1610
1323-376613X	37U 600 x 600 Front Glass/Back Perf Door	37	600 x 600 x 1833
1323-426613X	42U 600 x 600 Front Glass/Back Perf Door	42	600 x 600 x 2055
1323-476613X	47U 600 x 600 Front Glass/Back Perf Door	47	600 x 600 x 2277
600 x 800 Size			
1323-186813X	18U 600 x 800 Front Glass/Back Perf Door	18	600 x 800 x 988
1323-226813X	22U 600 x 800 Front Glass/Back Perf Door	22	600 x 800 x 1166
1323-276813X	27U 600 x 800 Front Glass/Back Perf Door	27	600 x 800 x 1388
1323-326813X	32U 600 x 800 Front Glass/Back Perf Door	32	600 x 800 x 1610
1323-376813X	37U 600 x 800 Front Glass/Back Perf Door	37	600 x 800 x 1833
1323-426813X	42U 600 x 800 Front Glass/Back Perf Door	42	600 x 800 x 2055
1323-476813X	47U 600 x 800 Front Glass/Back Perf Door	47	600 x 800 x 2277
600 x 900 Size			
1323-186913X	18U 600 x 900 Front Glass/Back Perf Door	18	600 x 900 x 988
1323-226913X	22U 600 x 900 Front Glass/Back Perf Door	22	600 x 900 x 1166
1323-276913X	27U 600 x 900 Front Glass/Back Perf Door	27	600 x 900 x 1388
1323-326913X	32U 600 x 900 Front Glass/Back Perf Door	32	600 x 900 x 1610
1323-376913X	37U 600 x 900 Front Glass/Back Perf Door	37	600 x 900 x 1833
1323-426913X	42U 600 x 900 Front Glass/Back Perf Door	42	600 x 900 x 2055
1323-476913X	47U 600 x 900 Front Glass/Back Perf Door	47	600 x 900 x 2277
600 x 960 Size			
1323-186A13X	18U 600 x 960 Front Glass/Back Perf Door	18	600 x 960 x 988
1323-226A13X	22U 600 x 960 Front Glass/Back Perf Door	22	600 x 960 x 1166
1323-276A13X	27U 600 x 960 Front Glass/Back Perf Door	27	600 x 960 x 1388
1323-326A13X	32U 600 x 960 Front Glass/Back Perf Door	32	600 x 960 x 1610
1323-376A13X	37U 600 x 960 Front Glass/Back Perf Door	37	600 x 960 x 1833
1323-426A13X	42U 600 x 960 Front Glass/Back Perf Door	42	600 x 960 x 2055
1323-476A13X	47U 600 x 960 Front Glass/Back Perf Door	47	600 x 960 x 2277
600 x 1000 Size			
1323-186113X	18U 600 x 1000 Front Glass/Back Perf Door	18	600 x 1000 x 988
1323-226113X	22U 600 x 1000 Front Glass/Back Perf Door	22	600 x 1000 x 1166
1323-276113X	27U 600 x 1000 Front Glass/Back Perf Door	27	600 x 1000 x 1388
1323-326113X	32U 600 x 1000 Front Glass/Back Perf Door	32	600 x 1000 x 1610
1323-376113X	37U 600 x 1000 Front Glass/Back Perf Door	37	600 x 1000 x 1833
1323-426113X	42U 600 x 1000 Front Glass/Back Perf Door	42	600 x 1000 x 2055
1323-476113X	47U 600 x 1000 Front Glass/Back Perf Door	47	600 x 1000 x 2277



Floor Standing Cabinet



800 x 800 Size			
1323-188813X	18U 800 x 800 Front Glass/Back Perf Door	18	800 x 800 x 988
1323-228813X	22U 800 x 800 Front Glass/Back Perf Door	22	800 x 800 x 1166
1323-278813X	27U 800 x 800 Front Glass/Back Perf Door	27	800 x 800 x 1388
1323-328813X	32U 800 x 800 Front Glass/Back Perf Door	32	800 x 800 x 1610
1323-378813X	37U 800 x 800 Front Glass/Back Perf Door	37	800 x 800 x 1833
1323-428813X	42U 800 x 800 Front Glass/Back Perf Door	42	800 x 800 x 2055
1323-478813X	47U 800 x 800 Front Glass/Back Perf Door	47	800 x 800 x 2277
800 x 900 Size			
1323-188913X	18U 800 x 900 Front Glass/Back Perf Door	18	800 x 900 x 988
1323-228913X	22U 800 x 900 Front Glass/Back Perf Door	22	800 x 900 x 1166
1323-278913X	27U 800 x 900 Front Glass/Back Perf Door	27	800 x 900 x 1388
1323-328913X	32U 800 x 900 Front Glass/Back Perf Door	32	800 x 900 x 1610
1323-378913X	37U 800 x 900 Front Glass/Back Perf Door	37	800 x 900 x 1833
1323-428913X	42U 800 x 900 Front Glass/Back Perf Door	42	800 x 900 x 2055
1323-478913X	47U 800 x 900 Front Glass/Back Perf Door	47	800 x 900 x 2277
800 x 960 Size			
1323-188A13X	18U 800 x 960 Front Glass/Back Perf Door	18	800 x 960 x 988
1323-228A13X	22U 800 x 960 Front Glass/Back Perf Door	22	800 x 960 x 1166
1323-278A13X	27U 800 x 960 Front Glass/Back Perf Door	27	800 x 960 x 1388
1323-328A13X	32U 800 x 960 Front Glass/Back Perf Door	32	800 x 960 x 1610
1323-378A13X	37U 800 x 960 Front Glass/Back Perf Door	37	800 x 960 x 1833
1323-428A13X	42U 800 x 960 Front Glass/Back Perf Door	42	800 x 960 x 2055
1323-478A13X	47U 800 x 960 Front Glass/Back Perf Door	47	800 x 960 x 2277
800 x 1000 Size			
1323-188113X	18U 800 x 1000 Front Glass/Back Perf Door	18	800 x 1000 x 988
1323-228113X	22U 800 x 1000 Front Glass/Back Perf Door	22	800 x 1000 x 1166
1323-278113X	27U 800 x 1000 Front Glass/Back Perf Door	27	800 x 1000 x 1388
1323-328113X	32U 800 x 1000 Front Glass/Back Perf Door	32	800 x 1000 x 1610
1323-378113X	37U 800 x 1000 Front Glass/Back Perf Door	37	800 x 1000 x 1833
1323-428113X	42U 800 x 1000 Front Glass/Back Perf Door	42	800 x 1000 x 2055
1323-478113X	47U 800 x 1000 Front Glass/Back Perf Door	47	800 x 1000 x 2277
800 x 1200 Size			
1323-188B13X	18U 800 x 1200 Front Glass/Back Perf Door	18	800 x 1200 x 988
1323-228B13X	22U 800 x 1200 Front Glass/Back Perf Door	22	800 x 1200 x 1166
1323-278B13X	27U 800 x 1200 Front Glass/Back Perf Door	27	800 x 1200 x 1388
1323-328B13X	32U 800 x 1200 Front Glass/Back Perf Door	32	800 x 1200 x 1610
1323-378B13X	37U 800 x 1200 Front Glass/Back Perf Door	37	800 x 1200 x 1833
1323-428B13X	42U 800 x 1200 Front Glass/Back Perf Door	42	800 x 1200 x 2055
1323-478B13X	47U 800 x 1200 Front Glass/Back Perf Door	47	800 x 1200 x 2277



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
600 x 600 Size			
1323-186633X	18U 600 x 600 Front Perf/Back Perf Door	18	600 x 600 x 988
1323-226633X	22U 600 x 600 Front Perf/Back Perf Door	22	600 x 600 x 1166
1323-276633X	27U 600 x 600 Front Perf/Back Perf Door	27	600 x 600 x 1388
1323-326633X	32U 600 x 600 Front Perf/Back Perf Door	32	600 x 600 x 1610
1323-376633X	37U 600 x 600 Front Perf/Back Perf Door	37	600 x 600 x 1833
1323-426633X	42U 600 x 600 Front Perf/Back Perf Door	42	600 x 600 x 2055
1323-476633X	47U 600 x 600 Front Perf/Back Perf Door	47	600 x 600 x 2277
600 x 800 Size			
1323-186833X	18U 600 x 800 Front Perf/Back Perf Door	18	600 x 800 x 988
1323-226833X	22U 600 x 800 Front Perf/Back Perf Door	22	600 x 800 x 1166
1323-276833X	27U 600 x 800 Front Perf/Back Perf Door	27	600 x 800 x 1388
1323-326833X	32U 600 x 800 Front Perf/Back Perf Door	32	600 x 800 x 1610
1323-376833X	37U 600 x 800 Front Perf/Back Perf Door	37	600 x 800 x 1833
1323-426833X	42U 600 x 800 Front Perf/Back Perf Door	42	600 x 800 x 2055
1323-476833X	47U 600 x 800 Front Perf/Back Perf Door	47	600 x 800 x 2277
600 x 900 Size			
1323-186933X	18U 600 x 900 Front Perf/Back Perf Door	18	600 x 900 x 988
1323-226933X	22U 600 x 900 Front Perf/Back Perf Door	22	600 x 900 x 1166
1323-276933X	27U 600 x 900 Front Perf/Back Perf Door	27	600 x 900 x 1388
1323-326933X	32U 600 x 900 Front Perf/Back Perf Door	32	600 x 900 x 1610
1323-376933X	37U 600 x 900 Front Perf/Back Perf Door	37	600 x 900 x 1833
1323-426933X	42U 600 x 900 Front Perf/Back Perf Door	42	600 x 900 x 2055
1323-476933X	47U 600 x 900 Front Perf/Back Perf Door	47	600 x 900 x 2277
600 x 960 Size			
1323-186A33X	18U 600 x 960 Front Perf/Back Perf Door	18	600 x 960 x 988
1323-226A33X	22U 600 x 960 Front Perf/Back Perf Door	22	600 x 960 x 1166
1323-276A33X	27U 600 x 960 Front Perf/Back Perf Door	27	600 x 960 x 1388
1323-326A33X	32U 600 x 960 Front Perf/Back Perf Door	32	600 x 960 x 1610
1323-376A33X	37U 600 x 960 Front Perf/Back Perf Door	37	600 x 960 x 1833
1323-426A33X	42U 600 x 960 Front Perf/Back Perf Door	42	600 x 960 x 2055
1323-476A33X	47U 600 x 960 Front Perf/Back Perf Door	47	600 x 960 x 2277
600 x 1000 Size			
1323-186133X	18U 600 x 1000 Front Perf/Back Perf Door	18	600 x 1000 x 988
1323-226133X	22U 600 x 1000 Front Perf/Back Perf Door	22	600 x 1000 x 1166
1323-276133X	27U 600 x 1000 Front Perf/Back Perf Door	27	600 x 1000 x 1388
1323-326133X	32U 600 x 1000 Front Perf/Back Perf Door	32	600 x 1000 x 1610
1323-376133X	37U 600 x 1000 Front Perf/Back Perf Door	37	600 x 1000 x 1833
1323-426133X	42U 600 x 1000 Front Perf/Back Perf Door	42	600 x 1000 x 2055
1323-476133X	47U 600 x 1000 Front Perf/Back Perf Door	47	600 x 1000 x 2277

Floor Standing Cabinet

800 x 800 Size			
1323-188833X	18U 800 x 800 Front Perf/Back Perf Door	18	800 x 800 x 988
1323-228833X	22U 800 x 800 Front Perf/Back Perf Door	22	800 x 800 x 1166
1323-278833X	27U 800 x 800 Front Perf/Back Perf Door	27	800 x 800 x 1388
1323-328833X	32U 800 x 800 Front Perf/Back Perf Door	32	800 x 800 x 1610
1323-378833X	37U 800 x 800 Front Perf/Back Perf Door	37	800 x 800 x 1833
1323-428833X	42U 800 x 800 Front Perf/Back Perf Door	42	800 x 800 x 2055
1323-478833X	47U 800 x 800 Front Perf/Back Perf Door	47	800 x 800 x 2277
800 x 900 Size			
1323-188933X	18U 800 x 900 Front Perf/Back Perf Door	18	800 x 900 x 988
1323-228933X	22U 800 x 900 Front Perf/Back Perf Door	22	800 x 900 x 1166
1323-278933X	27U 800 x 900 Front Perf/Back Perf Door	27	800 x 900 x 1388
1323-328933X	32U 800 x 900 Front Perf/Back Perf Door	32	800 x 900 x 1610
1323-378933X	37U 800 x 900 Front Perf/Back Perf Door	37	800 x 900 x 1833
1323-428933X	42U 800 x 900 Front Perf/Back Perf Door	42	800 x 900 x 2055
1323-478933X	47U 800 x 900 Front Perf/Back Perf Door	47	800 x 900 x 2277
800 x 960 Size			
1323-188A33X	18U 800 x 960 Front Perf/Back Perf Door	18	800 x 960 x 988
1323-228A33X	22U 800 x 960 Front Perf/Back Perf Door	22	800 x 960 x 1166
1323-278A33X	27U 800 x 960 Front Perf/Back Perf Door	27	800 x 960 x 1388
1323-328A33X	32U 800 x 960 Front Perf/Back Perf Door	32	800 x 960 x 1610
1323-378A33X	37U 800 x 960 Front Perf/Back Perf Door	37	800 x 960 x 1833
1323-428A33X	42U 800 x 960 Front Perf/Back Perf Door	42	800 x 960 x 2055
1323-478A33X	47U 800 x 960 Front Perf/Back Perf Door	47	800 x 960 x 2277
800 x 1000 Size			
1323-188133X	18U 800 x 1000 Front Perf/Back Perf Door	18	800 x 1000 x 988
1323-228133X	22U 800 x 1000 Front Perf/Back Perf Door	22	800 x 1000 x 1166
1323-278133X	27U 800 x 1000 Front Perf/Back Perf Door	27	800 x 1000 x 1388
1323-328133X	32U 800 x 1000 Front Perf/Back Perf Door	32	800 x 1000 x 1610
1323-378133X	37U 800 x 1000 Front Perf/Back Perf Door	37	800 x 1000 x 1833
1323-428133X	42U 800 x 1000 Front Perf/Back Perf Door	42	800 x 1000 x 2055
1323-478133X	47U 800 x 1000 Front Perf/Back Perf Door	47	800 x 1000 x 2277
800 x 1200 Size			
1323-188B33X	18U 800 x 1200 Front Perf/Back Perf Door	18	800 x 1200 x 988
1323-228B33X	22U 800 x 1200 Front Perf/Back Perf Door	22	800 x 1200 x 1166
1323-278B33X	27U 800 x 1200 Front Perf/Back Perf Door	27	800 x 1200 x 1388
1323-328B33X	32U 800 x 1200 Front Perf/Back Perf Door	32	800 x 1200 x 1610
1323-378B33X	37U 800 x 1200 Front Perf/Back Perf Door	37	800 x 1200 x 1833
1323-428B33X	42U 800 x 1200 Front Perf/Back Perf Door	42	800 x 1200 x 2055
1323-478B33X	47U 800 x 1200 Front Perf/Back Perf Door	47	800 x 1200 x 2277



Floor Standing Cabinet



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
600 x 600 Size			
1323-186612X	18U 600 x 600 Front Glass/Back Metal Door	18	600 x 600 x 988
1323-226612X	22U 600 x 600 Front Glass/Back Metal Door	22	600 x 600 x 1166
1323-276612X	27U 600 x 600 Front Glass/Back Metal Door	27	600 x 600 x 1388
1323-326612X	32U 600 x 600 Front Glass/Back Metal Door	32	600 x 600 x 1610
1323-376612X	37U 600 x 600 Front Glass/Back Metal Door	37	600 x 600 x 1833
1323-426612X	42U 600 x 600 Front Glass/Back Metal Door	42	600 x 600 x 2055
1323-476612X	47U 600 x 600 Front Glass/Back Metal Door	47	600 x 600 x 2277
600 x 800 Size			
1323-186812X	18U 600 x 800 Front Glass/Back Metal Door	18	600 x 800 x 988
1323-226812X	22U 600 x 800 Front Glass/Back Metal Door	22	600 x 800 x 1166
1323-276812X	27U 600 x 800 Front Glass/Back Metal Door	27	600 x 800 x 1388
1323-326812X	32U 600 x 800 Front Glass/Back Metal Door	32	600 x 800 x 1610
1323-376812X	37U 600 x 800 Front Glass/Back Metal Door	37	600 x 800 x 1833
1323-426812X	42U 600 x 800 Front Glass/Back Metal Door	42	600 x 800 x 2055
1323-476812X	47U 600 x 800 Front Glass/Back Metal Door	47	600 x 800 x 2277
600 x 900 Size			
1323-186912X	18U 600 x 900 Front Glass/Back Metal Door	18	600 x 900 x 988
1323-226912X	22U 600 x 900 Front Glass/Back Metal Door	22	600 x 900 x 1166
1323-276912X	27U 600 x 900 Front Glass/Back Metal Door	27	600 x 900 x 1388
1323-326912X	32U 600 x 900 Front Glass/Back Metal Door	32	600 x 900 x 1610
1323-376912X	37U 600 x 900 Front Glass/Back Metal Door	37	600 x 900 x 1833
1323-426912X	42U 600 x 900 Front Glass/Back Metal Door	42	600 x 900 x 2055
1323-476912X	47U 600 x 900 Front Glass/Back Metal Door	47	600 x 900 x 2277
600 x 960 Size			
1323-186A12X	18U 600 x 960 Front Glass/Back Metal Door	18	600 x 960 x 988
1323-226A12X	22U 600 x 960 Front Glass/Back Metal Door	22	600 x 960 x 1166
1323-276A12X	27U 600 x 960 Front Glass/Back Metal Door	27	600 x 960 x 1388
1323-326A12X	32U 600 x 960 Front Glass/Back Metal Door	32	600 x 960 x 1610
1323-376A12X	37U 600 x 960 Front Glass/Back Metal Door	37	600 x 960 x 1833
1323-426A12X	42U 600 x 960 Front Glass/Back Metal Door	42	600 x 960 x 2055
1323-476A12X	47U 600 x 960 Front Glass/Back Metal Door	47	600 x 960 x 2277
600 x 1000 Size			
1323-186112X	18U 600 x 1000 Front Glass/Back Metal Door	18	600 x 1000 x 988
1323-226112X	22U 600 x 1000 Front Glass/Back Metal Door	22	600 x 1000 x 1166
1323-276112X	27U 600 x 1000 Front Glass/Back Metal Door	27	600 x 1000 x 1388
1323-326112X	32U 600 x 1000 Front Glass/Back Metal Door	32	600 x 1000 x 1610
1323-376112X	37U 600 x 1000 Front Glass/Back Metal Door	37	600 x 1000 x 1833
1323-426112X	42U 600 x 1000 Front Glass/Back Metal Door	42	600 x 1000 x 2055
1323-476112X	47U 600 x 1000 Front Glass/Back Metal Door	47	600 x 1000 x 2277



Floor Standing Cabinet

800 x 800 Size			
1323-188812X	18U 800 x 800 Front Glass/Back Metal Door	18	800 x 800 x 988
1323-228812X	22U 800 x 800 Front Glass/Back Metal Door	22	800 x 800 x 1166
1323-278812X	27U 800 x 800 Front Glass/Back Metal Door	27	800 x 800 x 1388
1323-328812X	32U 800 x 800 Front Glass/Back Metal Door	32	800 x 800 x 1610
1323-378812X	37U 800 x 800 Front Glass/Back Metal Door	37	800 x 800 x 1833
1323-428812X	42U 800 x 800 Front Glass/Back Metal Door	42	800 x 800 x 2055
1323-478812X	47U 800 x 800 Front Glass/Back Metal Door	47	800 x 800 x 2277
800 x 900 Size			
1323-188912X	18U 800 x 900 Front Glass/Back Metal Door	18	800 x 900 x 988
1323-228912X	22U 800 x 900 Front Glass/Back Metal Door	22	800 x 900 x 1166
1323-278912X	27U 800 x 900 Front Glass/Back Metal Door	27	800 x 900 x 1388
1323-328912X	32U 800 x 900 Front Glass/Back Metal Door	32	800 x 900 x 1610
1323-378912X	37U 800 x 900 Front Glass/Back Metal Door	37	800 x 900 x 1833
1323-428912X	42U 800 x 900 Front Glass/Back Metal Door	42	800 x 900 x 2055
1323-478912X	47U 800 x 900 Front Glass/Back Metal Door	47	800 x 900 x 2277
800 x 960 Size			
1323-188A12X	18U 800 x 960 Front Glass/Back Metal Door	18	800 x 960 x 988
1323-228A12X	22U 800 x 960 Front Glass/Back Metal Door	22	800 x 960 x 1166
1323-278A12X	27U 800 x 960 Front Glass/Back Metal Door	27	800 x 960 x 1388
1323-328A12X	32U 800 x 960 Front Glass/Back Metal Door	32	800 x 960 x 1610
1323-378A12X	37U 800 x 960 Front Glass/Back Metal Door	37	800 x 960 x 1833
1323-428A12X	42U 800 x 960 Front Glass/Back Metal Door	42	800 x 960 x 2055
1323-478A12X	47U 800 x 960 Front Glass/Back Metal Door	47	800 x 960 x 2277
800 x 1000 Size			
1323-188112X	18U 800 x 1000 Front Glass/Back Metal Door	18	800 x 1000 x 988
1323-228112X	22U 800 x 1000 Front Glass/Back Metal Door	22	800 x 1000 x 1166
1323-278112X	27U 800 x 1000 Front Glass/Back Metal Door	27	800 x 1000 x 1388
1323-328112X	32U 800 x 1000 Front Glass/Back Metal Door	32	800 x 1000 x 1610
1323-378112X	37U 800 x 1000 Front Glass/Back Metal Door	37	800 x 1000 x 1833
1323-428112X	42U 800 x 1000 Front Glass/Back Metal Door	42	800 x 1000 x 2055
1323-478112X	47U 800 x 1000 Front Glass/Back Metal Door	47	800 x 1000 x 2277
800 x 1200 Size			
1323-188B12X	18U 800 x 1200 Front Glass/Back Metal Door	18	800 x 1200 x 988
1323-228B12X	22U 800 x 1200 Front Glass/Back Metal Door	22	800 x 1200 x 1166
1323-278B12X	27U 800 x 1200 Front Glass/Back Metal Door	27	800 x 1200 x 1388
1323-328B12X	32U 800 x 1200 Front Glass/Back Metal Door	32	800 x 1200 x 1610
1323-378B12X	37U 800 x 1200 Front Glass/Back Metal Door	37	800 x 1200 x 1833
1323-428B12X	42U 800 x 1200 Front Glass/Back Metal Door	42	800 x 1200 x 2055
1323-478B12X	47U 800 x 1200 Front Glass/Back Metal Door	47	800 x 1200 x 2277

X=Colour

Floor Standing Cabinet IP 55



The Easycab range of floor standing cabinet IP55 designed for outdoor telecommunication purpose. The smart design and professional engineering provides easy installation and maintenance. It is comply with ANSI/EIA RS-310-D, IEC 297-2, DIN 41491, PART 1, DIN 41497, PART 7, GB/T3047.2-92, ETSI standards.

Material	SPCC cold rolled steel
Degree of protection	IP55
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	800 KGS
Material thickness	Mounting profile: 2.0mm angel: 1.5mm, Other: 1.2mm



FEATURES

Intelligent design ensures easy installation
Composition of main body, roof, rear panel, side panel and base.
The double wall type rear panel, the dual side panel, both are fixed inside.
180 degree turning angle for heavy toughened metal front door
19" installation, Single Section cabinet
Protected against dust limited ingress
Protected against low pressure jets of water from all directions - limited ingress
The natural wind cooling. The cabinet can install fans on the top cover and punch the hole with dustproof cover at the bottom of two sides.
Protection Rank: IP55 EN60529/10.91

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
600 x 800 Size			
1326-186820X	18U 600 x 800 Single Section FS IP 55 Cabinet	8	600 x 800 x 988
1326-226820X	22U 600 x 800 Single Section FS IP 55 Cabinet	2	600 x 800 x 1166
1326-276820X	27U 600 x 800 Single Section FS IP 55 Cabinet	7	600 x 800 x 1388
1326-326820X	32U 600 x 800 Single Section FS IP 55 Cabinet	2	600 x 800 x 1610
1326-376820X	37U 600 x 800 Single Section FS IP 55 Cabinet	7	600 x 800 x 1833
1326-426820X	42U 600 x 800 Single Section FS IP 55 Cabinet	2	600 x 800 x 2055
1326-476820X	47U 600 x 800 Single Section FS IP 55 Cabinet	7	600 x 800 x 2277

600 x 600 Size			
1326-186620X	18U 600 x 600 Single Section FS IP 55 Cabinet	18	600 x 600 x 988
1326-226620X	22U 600 x 600 Single Section FS IP 55 Cabinet	22	600 x 600 x 1166
1326-276620X	27U 600 x 600 Single Section FS IP 55 Cabinet	27	600 x 600 x 1388
1326-326620X	32U 600 x 600 Single Section FS IP 55 Cabinet	32	600 x 600 x 1610
1326-376620X	37U 600 x 600 Single Section FS IP 55 Cabinet	37	600 x 600 x 1833
1326-426620X	42U 600 x 600 Single Section FS IP 55 Cabinet	42	600 x 600 x 2055
1326-476620X	47U 600 x 600 Single Section FS IP 55 Cabinet	47	600 x 600 x 2277



Power Distribution Unit

EASYCAB



NORDEN Power Distribution Units are designed and manufactured in a modularized way exclusively for cabinets. The product is equipped with supply socket modules meeting different systems and standards in the world. The series products can be produced accordingly to customer's special requirement, the longest dimension can reach to 4600 mm, and load can reach to double 32A. No change to the cabinet or additional parts is necessary for product installation.

The installation requires only pointing the product at the holes on the frame and a subsequent securing and position of bolts and nuts.



COMPLIANCE

EMC & safety:-EN 55022 Class A,EN 55024,EN 61000-3-2,EN 61000-3-3,FCC Part 15 Class A,
ICES-003,PSE,UL Listed, VCCI Class A,VDE
Environmental: RoHS, REACH: Contains No SVHCs
Socket/Outlet Standard: BS1363
Cable plug: BS1363

DESIGN & MATERIALS

Material of Construction	PC/ABS alloy, High Impact flame retardant thermoplastic –UL94-V0
Shell Material & Colour	Aluminium, black
Outlet Qty.	6 way, 8 way, 10 way,12 way, 15 way
Power Input Style	Left end single input style
Bracket Installation Style	Frontal Installation Style
Control function	Switch
Lead length	1.8m, 3m, 5m (other cable length available on request)

ELECTRICAL & ENVIRONMENTAL DATA

Current Rating	13A or 16A 250VAC
Maximum load current available in	13A or 16A
Input frequency	50 or 60 Hz
Maximum load capacity	4KW
Operating Environment	-5°C to +45°C
Operating Relative Humidity	5 – 95 %
Operating Elevation	0-3000 metres
Storage Temperature	-25°C to +65 °C
Storage Relative Humidity	5 – 95 %
Storage Elevation	0-15000 metres



ORDERING INFORMATION

PART NUMBER	DESCRIPTION
13 Amp PDU	
1331-1061X	6 Way PDU with main switch, 13Amp, 1.8mtr cable length, 19" installation
1331-1062X	6 Way PDU with main switch, 13Amp, 3.0mtr cable length, 19" installation
1331-1063X	6 Way PDU with main switch, 13Amp, 5.0mtr cable length, 19" installation
1331-1081X	8 Way PDU with main switch, 13Amp, 1.8mtr cable length, Vertical Installation
1331-1082X	8 Way PDU with main switch, 13Amp, 3.0mtr cable length, Vertical Installation
1331-1083X	8 Way PDU with main switch, 13Amp, 5.0mtr cable length, Vertical Installation
1331-1101X	10 Way PDU with main switch, 13Amp, 1.8mtr cable length, Vertical Installation
1331-1102X	10 Way PDU with main switch, 13Amp, 3.0mtr cable length, Vertical Installation
1331-1103X	10 Way PDU with main switch, 13Amp, 5.0mtr cable length, Vertical Installation
1331-1121X	12 Way PDU with main switch, 13Amp, 1.8mtr cable length, Vertical Installation
1331-1122X	12 Way PDU with main switch, 13Amp, 3.0mtr cable length, Vertical Installation
1331-1123X	12 Way PDU with main switch, 13Amp, 5.0mtr cable length, Vertical Installation
1331-1151X	15 Way PDU with main switch, 13Amp, 1.8mtr cable length, Vertical Installation
1331-1152X	15 Way PDU with main switch, 13Amp, 3.0mtr cable length, Vertical Installation
1331-1153X	15 Way PDU with main switch, 13Amp, 5.0mtr cable length, Vertical Installation
16 Amp PDU	
1331-2061X	6 Way PDU with main switch, 16Amp, 1.8mtr cable length, 19" installation
1331-2062X	6 Way PDU with main switch, 16Amp, 3.0mtr cable length, 19" installation
1331-2063X	6 Way PDU with main switch, 16Amp, 5.0mtr cable length, 19" installation
1331-2081X	8 Way PDU with main switch, 16Amp, 1.8mtr cable length, Vertical Installation
1331-2082X	8 Way PDU with main switch, 16Amp, 3.0mtr cable length, Vertical Installation
1331-2083X	8 Way PDU with main switch, 16Amp, 5.0mtr cable length, Vertical Installation
1331-2101X	10 Way PDU with main switch, 16Amp, 1.8mtr cable length, Vertical Installation
1331-2102X	10 Way PDU with main switch, 16Amp, 3.0mtr cable length, Vertical Installation
1331-2103X	10 Way PDU with main switch, 16Amp, 5.0mtr cable length, Vertical Installation
1331-2121X	12 Way PDU with main switch, 16Amp, 1.8mtr cable length, Vertical Installation
1331-2122X	12 Way PDU with main switch, 16Amp, 3.0mtr cable length, Vertical Installation
1331-2123X	12 Way PDU with main switch, 16Amp, 5.0mtr cable length, Vertical Installation
1331-2151X	15 Way PDU with main switch, 16Amp, 1.8mtr cable length, Vertical Installation
1331-2152X	15 Way PDU with main switch, 16Amp, 3.0mtr cable length, Vertical Installation
1331-2153X	15 Way PDU with main switch, 16Amp, 5.0mtr cable length, Vertical Installation

X=Colour



Open Rack

NORDEN open racks designed for easy assemble and disassemble.
Various optional accessories according to requirements.

Comply with ANSI/EIA RS-310-D, IEC 297-2, DIN41491; PART 1
DIN41491; PART 7 GB/T3047.2-92 standard.

Material	SPCC cold rolled steel
Surface finish	Degreasing, phosphoric, powder coated
Loading capacity	150 Kg
Material thickness	Plinth: 2.0mm, Front and bottom beams: 2.0mm, Pole: 1.5mm



ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Pole	1.5mm SPCC cold rolled steel	Powder coating	2 piece
Plinth	2.0mm SPCC cold rolled steel	Powder coating	2 piece
Horizontal beam	2.0mm SPCC cold rolled steel	Powder coating	2 piece
2" heavy duty castor	-	-	4 piece
Square screw & nut	steel	Zinc colour	10 set
Allen wrench	steel	Black colour	1 piece

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CAPACITY (U)	DIMENSION (W X D X H) MM
1325-226600X	22U 600 x 600 Open Rack	22	600 x 600 x 1166
1325-276600X	27U 600 x 600 Open Rack	27	600 x 600 x 1388
1325-326600X	32U 600 x 600 Open Rack	32	600 x 600 x 1610
1325-376600X	37U 600 x 600 Open Rack	37	600 x 600 x 1833
1325-426600X	42U 600 x 600 Open Rack	42	600 x 600 x 2055
1325-476600X	47U 600 x 600 Open Rack	47	600 x 600 x 2277

X = Colour



Cantilever Shelf


This shelf uses for placing the equipments inside the cabinet.
Available on different sizes.

Material	SPCC cold rolled steel
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 7044/RAL 9004
Thickness	1.5mm

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	DEPTH (mm)
1332-1MX	1U Cantilever Shelf 250 mm	250
1332-1NX	1U Cantilever Shelf 350 mm	350

X=colour

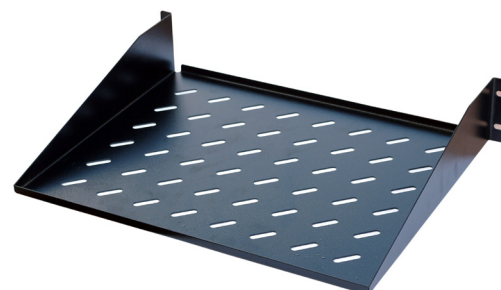

Fixed Shelf


This shelf uses for placing the equipments inside the cabinet.
Available on different sizes.

Material	1.2mm SPCC cold rolled steel
Loading capacity	60KG
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 7044/ RAL 9004

ORDERING INFORMATION


PART NUMBER	DESCRIPTION	DIMENSION (MM)		
		W	D1	D2
1332-26X	Fixed Shelf for 19", 600 Depth Cabinets	470	350	260
1332-28X	Fixed Shelf for 19", 800 Depth Cabinets	470	550	460
1332-29X	Fixed Shelf for 19", 900 Depth Cabinets	470	650	560
1332-2AX	Fixed Shelf for 19", 960 Depth Cabinets	470	710	620
1332-21X	Fixed Shelf for 19", 1000 Depth Cabinets	470	710	620

X=colour

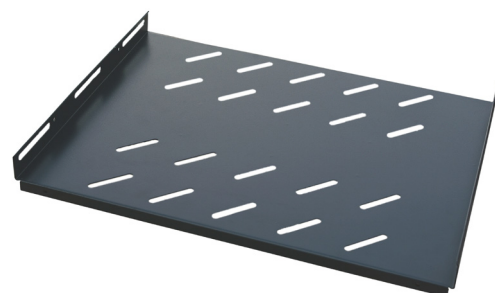

Heavy Duty Fixed Shelf

This shelf uses for placing the equipments inside the cabinet and accepts the load up to 100 Kg.

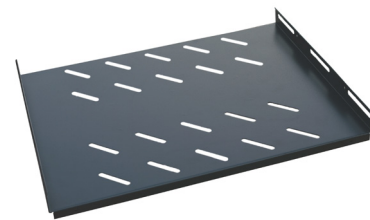

Material	1.2mm SPCC cold rolled steel
Loading capacity	100KG
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 7044/ RAL 9004


ORDERING INFORMATION

PART NUMBER	DESCRIPTION	DIMENSION (MM)		
		W	D1	D2
1332-36X	Heavy Duty Fixed Shelf for 19", 600 Depth Cabinets	470	350	260
1332-38X	Heavy Duty Fixed Shelf for 19", 800 Depth Cabinets	470	550	460
1332-39X	Heavy Duty Fixed Shelf for 19", 900 Depth Cabinets	470	650	560
1332-3AX	Heavy Duty Fixed Shelf for 19", 960 Depth Cabinets	470	710	620
1332-31X	Heavy Duty Fixed Shelf for 19", 1000 Depth Cabinets	470	710	620

X=colour

Sliding Shelf

This shelf is used for placing the equipments inside the cabinet and can be pull out. Available on different sizes.

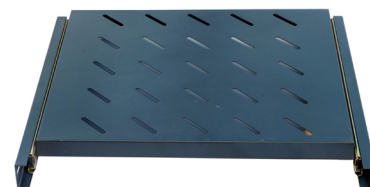

Material	1.2mm SPCC cold rolled steel, 2-section slide
Loading capacity	20KG
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 7044/ RAL 9004
Flexing length	210MM

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	DIMENSION (MM)		
		W	D1	D2
1332-46X	Sliding Shelf for 19", 600 Depth Cabinets	470	350	380
1332-48X	Sliding Shelf for 19", 800 Depth Cabinets	470	550	580
1332-49X	Sliding Shelf for 19", 900 Depth Cabinets	470	650	680
1332-4AX	Sliding Shelf for 19", 960 Depth Cabinets	470	710	740
1332-41X	Sliding Shelf for 19", 1000 Depth Cabinets	470	710	740

X=colour

Keyboard Tray

This shelf is used for placing the keyboard inside the cabinet and can be pull out. Available on different sizes.

Material	1.2mm SPCC cold rolled steel, 2-section slide
Loading capacity	20KG
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 7044/ RAL 9004
Flexing length	210MM



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	DIMENSION (MM)		
		W	D1	D2
1332-56X	Keyboard Tray for 19", 600 Depth Cabinets	470	350	380
1332-58X	Keyboard Tray for 19", 800 Depth Cabinets	470	550	580
1332-59X	Keyboard Tray for 19", 900 Depth Cabinets	470	650	680
1332-5AX	Keyboard Tray for 19", 960 Depth Cabinets	470	710	740
1332-51X	Keyboard Tray for 19", 1000 Depth Cabinets	470	710	740

X=colour

Key Board Tray With Mouse Panel

Keyboard tray with mouse panel for 19" cabinet designed for easy operation. The loading capacity is 20Kg with 2U height.

Material	1.2mm SPCC Cold rolled steel, 3pcs sliding rails
Surface Finish	Degreasing, phosphoric, powder coated
Loading Capacity	20Kg
Flexing length	220mm



ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1332-60X	Keyboard tray with mouse panel

X=colour

Plinth

Material	SPCC Cold rolled steel, Plate: 1.2mm, Others: 2.0 mm
Surface Finish	Degreasing, phosphoric, powder coated
Loading Capacity	20Kg
Flexing length	220mm




ORDERING INFORMATION

PART NUMBER	DESCRIPTION	DIMENSION (MM)		
		W	D	H
1333-66X	Plinth 600 Width and 600 Depth	596	596	100
1333-68X	Plinth 600 Width and 800 Depth	596	796	100
1333-69X	Plinth 600 Width and 900-Depth	596	896	100
1333-6AX	Plinth 600 Width and 960 Depth	596	956	100
1333-61X	Plinth 600 Width and 1000-Depth	596	996	100
1333-88X	Plinth 800 Width and 800 Depth	796	796	100
1333-89X	Plinth 800 Width and 900 Depth	796	896	100
1333-8AX	Plinth 800 Width and 960 Depth	796	956	100
1333-81X	Plinth 800 Width and 1000 Depth	796	996	100
1333-8BX	Plinth 800 Width and 1200 Depth	796	1196	100

X=colour

Fan Unit

Material	SPCC cold rolled steel
Thickness	Power cord box: 1.2mm Fan tray: 0.8mm
Voltage	230V AC/115V AC
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 7044/ RAL 9004



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	DIMENSION (mm)	
		W	D
1334-26X	Fan Unit for 600mm Cabinet: 2 Fans	450	351
1334-28X	Fan Unit for 800mm Cabinet : 2 Fans	450	551
1334-46X	Fan Unit for 600mm Cabinet : 4 Fans	450	351
1334-48X	Fan Unit for 800mm Cabinet : 4 Fans	450	551
1334-49X	Fan Unit for 900mm Cabinet : 4 Fans	450	651
1334-4AX	Fan Unit for 960mm Cabinet : 4 Fans	450	711
1334-41X	Fan Unit for 1000mm Cabinet : 4 Fans	450	751
1334-4BX	Fan Unit for 1200mm Cabinet : 4 Fans	450	951

X=colour

Single Fan

Dimension	120mm X 120mm X 38mm
Mounting dimension	105mm X 105mm
Air flowing	50-110CBM/H



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	VOLTAGE
1334-12X	Single Fan 220V	220V
1334-11X	Single Fan 110V	110V

X=colour

1U Fan Unit

Temperature	0 °C - 50°C, Input: 220V AC/115V AC
Material	1.2mm SPCC cold rolled steel
Colour	RAL 7044/ RAL 9004
Voltage	230V AC/115V AC



ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1334-201X	1U Fan Unit With 2 Fans
1334-301X	1U Fan Unit With 3 Fans
1334-401X	1U Fan Unit With 4 Fans

X=colour

1U Fan Unit With Thermostat

Temperature	0°C - 50°C, input: 220V AC/115V AC
Material	SPCC cold rolled steel T1.2
Colour	RAL 7044/ RAL 9004
Voltage	230V AC/115V AC



ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1334-21TX	1U Fan Unit With 2 Fans + Thermostat
1334-31TX	1U Fan Unit With 3 Fans + Thermostat
1334-41TX	1U Fan Unit With 4 Fans + Thermostat

X=colour

Metal Cable Management

Material	SPCC Cold rolled steel
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 9004/RAL 7044
Thickness	1.2mm



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	HEIGHT (U)
1335-M201X	1U Metal Cable Management with cover	1U
1335-M101X	1U Metal Cable Management w/o cover	1U
1335-M202X	2U Metal Cable Management with cover	2U
1335-M102X	2U Metal Cable Management w/o cover	2U
1335-M242X	42U Metal Cable Management with cover	42U

X=colour

Plastic Cable Management

Material	1.2mm SPCC plastic cable management ring
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 7044/ RAL 9004



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	HEIGHT (U)
1335-P001X	1U Plastic Cable Management with 5 rings	1U

X=colour



Blank Panel

Material	1.2mm SPCC Cold rolled steel
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 9004/RAL 7044



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	HEIGHT (U)
1336-101X	IU Blank Panel	1U
1336-102X	2U Blank Panel	2U
1336-103X	3U Blank Panel	3U

X=colour

Brush Panel

Material	1.2mm SPCC Cold rolled steel
Surface Finish	Degreasing, phosphoric, powder coated
Colour	RAL 9004/RAL 7044



ORDERING INFORMATION

PART NUMBER	DESCRIPTION	HEIGHT (U)
1336-201X	IU Brush Panel	1U
1336-202X	2U Brush Panel	2U

X=colour

Digital Temperature Unit

NORDEN digital temperature unit adjust inner cabinets temperature by intelligent control through fan unit.
Simple structure ensure easy installation and cabling operation with 2 way output.



ELECRICAL DATA

DESCRIPTION	PARAMETER
Temperature Range	0°C ~ 50°C
Input	PTC (10KΩ)
Output	2-way output
Consumption	3W
Power supply	220VAC
Voltage/Frequency	220V/50-60Hz
Current	13A
Plug Type	UK
Accuracy	±1°C
Display	2 way 8 section digital pipe, red
Ambient temperature	-10°C-70°C
Maintain temperature	-20°C-80°C
Ambient humidity	<85%RH
Installation	19" standard.

ACCESSORIES

ACCESSORIES	MATERIAL OF CONSTRUCTION	SURFACE COATING & COLOUR	QUANTITY
Temp. controller	1.2mm SPCC cold rolled steel	Powder coated	1 piece
Cable 1.2m length	-	-	1 piece
Temperature sensor	-	-	1 piece
M6 Square nut	Steel	Zinc Colour	4 piece
M6 B-head screw	Steel	Zinc Colour	4 piece
Allen wrench	Steel	Black	1 piece
M4 Screw	Steel	Black	8 piece

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1337-1X	Digital Temperature Unit


X=colour



Adjustable Feet

Adjustable Feet designed for fix the cabinet in a permanent place.

Material	Steel
Surface Finish	Carbonic black
Loading Capacity	280-320 Kg



ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1338-110X	M 10 Feet
1338-112X	M 12 Feet

X=colour

Castors

Available in different sizes either heavy duty or light duty with break/without breaks.




ORDERING INFORMATION

PART NUMBER	DESCRIPTION	LOAD (KG)	H	Ø
1338-201X	2" Heavy Duty Castor With Brake	150	72	50.8
1338-401X	2" Light Duty Castor With Brake	100	65	50.8
1338-301X	2" Heavy Duty Castor W/O Brake	150	72	50.8
1338-202X	2.5" Heavy Duty Castor With Brake	150	84.7	63.5
1338-302X	2.5" Heavy Duty Castor W/O Brake	150	84.7	63.5

X=colour

Cage Nuts

Screw	M6 x16: nut: M6
Surface Finish	Plated Nickel
Washer	Ø 6



ORDERING INFORMATION

PART NUMBER	SET/BAG
1339-1X	Cage Nuts (20pcs/pkt)

X=colour

